



**Shanklin**<sup>®</sup>

# Model T-6H Shrink Tunnel

Built to Last, Engineered to Perform, and Priced for Optimum Value!



- **Dependable**—Straightforward design means less maintenance, trouble-free operation.
- **Moderately Priced**—An excellent value!
- **Easy to Use**—Set temperature, conveyor speed and air velocity, and you're ready to go.
- **Two-Year Warranty**—A hallmark of our continued assurance of quality.


**Sealed Air Corporation**

**Simple, reliable, and hard-working...that's the Shanklin high-performance line of proven shrink tunnels. Contact your Shanklin distributor to find out more.**


## Our Rugged, Reliable Compact Performer

The Shanklin Model T-6H Shrink Tunnel is similar to our Model T-6XL, except that the opening height is 3" higher (10") to accommodate higher profile packages. You'll still enjoy the same excellent high performance, versatile standard features, superior shrink capabilities, and value price of the Model T-6XL, but in a version that expands your packaging options.

## T-6H/T-6HC Plan Views

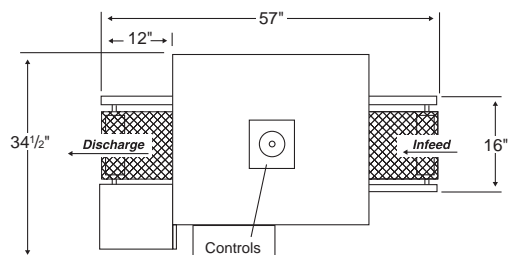

T-6H

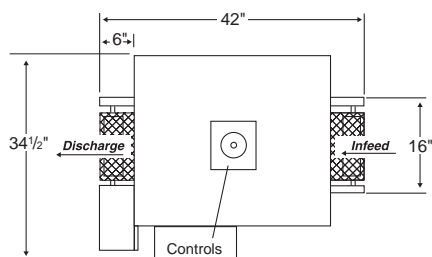

T-6HC

**STAINLESS STEEL MODELS AVAILABLE**

## Shanklin Model T-6H Specifications

|                               |   |
|-------------------------------|---|
| <b>Tunnel passage</b>         | 10" high x 18" wide x 30" long  |
| <b>Overall dimensions</b>     | 67" high x 34 1/2" wide x 57" long*   |
| <b>Conveyor height</b>        | 28" minimum, 40" maximum  |
| <b>Conveyor speeds</b>        | Variable from 15 to 66 ft./min.   |
| <b>Blower motor</b>           | 3/4 hp, single phase capacitor start  |
| <b>Heaters</b>                | Three finstrip (encased element)  |
| <b>Power</b>                  | 230 volts, 38 amps, 1 phase, 8.7 KVA max. (4.4 KVA normal usage)  |
| <b>Temperature controller</b> | Precision indicating controller<br>Calibrated 50° to 500° F   |
| <b>Controls</b>               | <ul style="list-style-type: none"> <li>• Conveyor variable speed control</li> <li>• On/off circuit breaker</li> <li>• Auxiliary heater switch</li> <li>• Variable air velocity control</li> <li>• Conveyor on/off switch</li> </ul> |
| <b>Accessories</b>            | <ul style="list-style-type: none"> <li>• Teflon belts</li> <li>• End viewing window</li> <li>• Package guides</li> <li>• Casters</li> </ul>   |


U.S. Patent No. 3,312,811

Specifications on all machines subject to change without notice. Some photos may show accessories not part of the basic machine.

\*A 42" long compact conveyor is available as a Model T-6HC. See plan view at left.

## The Perfect Partner!

Partner your T-6H Shanklin Shrink Tunnel with a Shanklin A-26A Automatic L-Sealer for a complete, dependable, quality shrink packaging solution.

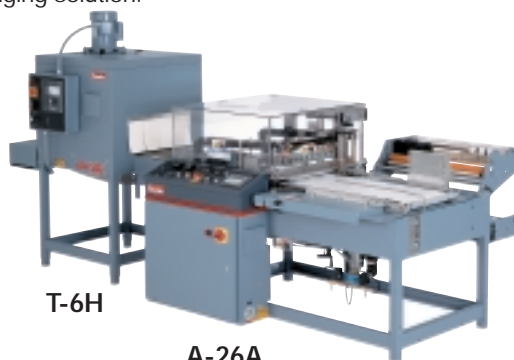

T-6H

A-26A

**Distributed by:**



**Shanklin**

**Sealed Air Corporation**

100 Westford Road  
Ayer, Massachusetts 01432  
(978) 772-3200 Fax: (978) 772-5660  
www.shanklincorp.com

**CORPORATE OFFICES:** Park 80 East, Saddle Brook, NJ 07663  
**INTERNATIONAL:** Australia, Belgium, Brazil, Canada, China, England, Finland, France, Germany, Hong Kong, India, Italy, Japan, Korea, Malaysia, Mexico, Netherlands, New Zealand, Norway, Philippines, Poland, Singapore, Spain, Sweden, Taiwan, Thailand.

® Reg. U.S. Pat. Off. © Sealed Air Corporation 2003. Shanklin and the Shanklin logo are registered trademarks of the Shanklin Corporation. All Rights Reserved.